




VIEW 3-D MODEL: Visit our website to view an interactive 3-D PDF of these products.

NOZZLES



RESIN TRAPS




BASKETS



SUPPORT GRIDS



PANELS



PIPE SPOOLS




WEDGE WIRE SLOT SIZES

U.S. Mesh	Inches	Microns	Millimetres
3	.265	6730	6.73
3.5	.223	5660	5.66
4	.187	4760	4.76
5	.157	4000	4.00
6	.132	3360	3.36
7	.111	2830	2.83
8	.0937	2380	2.38
10	.0787	2000	2.00
12	.0661	1680	1.68
14	.0555	1410	1.41
16	.0469	1190	1.19
18	.0394	1000	1.00
20	.0331	841	.84
25	.0280	707	.71
30	.0232	595	.59
35	.0197	500	.50
40	.0165	420	.420
45	.0138	354	.354
50	.0117	297	.297
60	.0098	250	.250
70	.0083	210	.210
80	.0070	177	.177
100	.0059	149	.149
120	.0049	125	.125
140	.0041	105	.105
170	.0035	88	.088
200	.0029	74	.074
230	.0024	63	.063
270	.0021	53	.053
325	.0017	44	.044
400	.0015	37	.037



VIEW 3-D MODEL: Visit our website to view an interactive 3-D PDF of these products.

HEADER SYSTEMS HUB ASSEMBLIES

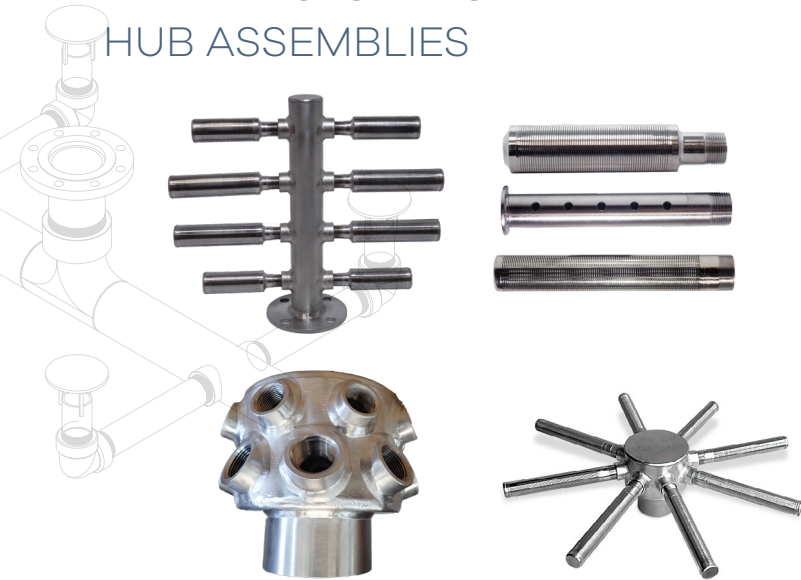

INLET DISTRIBUTORS AIR SCOUR ASSEMBLIES




Your Industry Leading Wedge Wire Screen Partner helping you lower your maintenance and operational costs.

WEDGE WIRE SCREEN DIAMETERS

Screen diameters range from 0.750" to 38" and up in fabricated sections. Your specific tolerance and size requirements will be adhered to and will meet the required industry standards.

WEDGE WIRE PROFILES



**EXTERNAL
AXIAL**



**STANDARD
WOUND**



**REVERSE
FORMED**



**REVERSE
AXIAL**



**INVERTED
WRAP**

BENEFITS OF WEDGE WIRE

- Extended product life and increased efficiency.
- Consistent slot size provides consistent filtration.
- Higher percentage of open area results in higher flow rates.
- Inherently clog resistant, making it easier to maintain and operate.
- Ideal for self-cleaning applications which require low maintenance.
- Low pressure loss provides increased efficiency.
- Resistance welded structure allows product to withstand high design pressures.
- Long lifespan, saving you time and money on maintenance.
- Available in alloys for use in challenging and corrosive environments.

Maximize the lifespan of your water treatment and ion exchange vessels with long-lasting internals that provide consistent results.

SLOT-SIZE RANGE: 0.001"—0.625"

MATERIALS:

304 / 304L
316 / 316L
321 / 321H
347 / 347H
410 / 410S
430
ALLOY 20

COPPER NICKEL
DUPLEX 2205
HASTELLOY® B3
HASTELLOY® C-276
MONEL 400
SUPER DUPLEX 2507
TITANIUM

25 years of delivering high-quality products, competitive pricing and unmatched customer service.